GPUpartner

VALIDATION REPORT · TEXT GENERATION

GLM-5.3 Flash

on RTX PRO 6000 Blackwell · 4-bit (Q4_K_M) · Ollama / LM Studio · Chat

STATUS · NOV 22, 2026

Not validated

0 of 2 checks pass

GLM-5.3 Flash at 4-bit needs 183 GB; the RTX PRO 6000 Blackwell can use 96.0 GB. The smallest machine we checked that runs it is the DGX Station GB300.


VALIDATION

CHECK	TARGET	RESULT	STATUS
Fits in GPU memory	96.0 GB usable	183 GB needed	FAIL
Headroom	5% free	none	FAIL
Context for chat	16K or more	–	NOT TESTED
Writing speed	15 tok/s or more	–	NOT TESTED
First reply	under 3 s, 2K prompt	–	NOT TESTED

Targets: a reply you can read along with, a first reply the use case tolerates, and 5% of memory left free. Calculated from published specs, not benchmarked.

BUDGET

HARDWARE, ONE-TIME	MSRP not entered
POWER, PER YEAR	Doesn't run on this machine
CLOUD INSTEAD, PER YEAR	$3,444
3-YEAR TOTAL, OWNED	n/a
3-YEAR TOTAL, CLOUD	$10,331
BREAK-EVEN	n/a

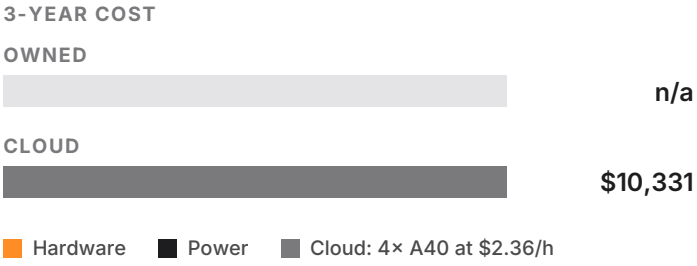

Budget basis: 4 h a day, power at $0.18 per kWh, cloud at RunPod on-demand prices as of Nov 22, 2026. Hardware at the MSRP entered in the calculator, not a GPU Partner quote. A 3-year view; resale value, staff time and taxes aren't counted.

GPUpartner

TECHNICAL DETAIL · TEXT GENERATION

GLM-5.3 Flash

on RTX PRO 6000 Blackwell · 4-bit (Q4_K_M) · Ollama / LM Studio · Chat

SETUP

PARAMETERS	321B, 18B active
PRECISION	4-bit (Q4_K_M)
CONTEXT	8K, auto
CHATS AT ONCE	1
USE	Chat
RUNS IN	Ollama / LM Studio
HARDWARE	RTX PRO 6000 Blackwell
GPU CAN USE	96.0 GB of 96.0 GB

MEMORY

WEIGHTS	181 GB
CONTEXT	240 MB
RUNTIME	891 MB
SYSTEM	0.0 GB
OVER BY	86.5 GB

SUGGESTED CHANGES

2× RTX PRO 6000 BLACKWELL	Fits across the cards, 8K context
DGX STATION GB300	Runs it with 1M context
2× H200 NVL	Runs it with 1M context
M5 ULTRA · 512 GB	Runs it with 1M context

SAME MODEL, OTHER MACHINES

RTX 4090	Too big
RTX 5090	Too big
M5 MAX 128 GB	Too big
M3 ULTRA 256 GB	3-bit · 43 tok/s
DGX SPARK 128 GB	2-bit · 26 tok/s
RYZEN AI MAX+ 395 128 GB	Too big
DGX STATION GB300	5-bit · 188 tok/s

HOW TO RUN IT

LLAMA.CPP	`llama-server -hf unsloth/GLM-5.3-Flash-GGUF`
VLLM	`vllm serve zai-org/GLM-5.3-Flash`
MLX (MAC)	`mlx_lm.chat --model mlx-community/GLM-5.3-Flash-4bit`
MODEL CARD	huggingface.co/zai-org/GLM-5.3-Flash

METHOD AND ASSUMPTIONS

Memory is the weights (parameters times bits per weight, read from each model's config.json), the context cache for every chat, and the runtime, against the memory this GPU can use after the OS and display take theirs. Writing speed is memory bandwidth over the bytes read per token, plus a per-layer latency, calibrated against llama.cpp benchmarks. First reply is the prompt's FLOPs over the chip's dense 16-bit TFLOPS at the runtime's measured efficiency. Running cost is power at the wall at your rate and hours; the cloud figure is the cheapest RunPod on-demand GPU that runs the same job. Accuracy: memory lands within about a gigabyte; speeds and times are rough, about ±25%. Model data and hardware specs checked Nov 2026; cloud prices are RunPod's on-demand list as of Nov 22, 2026. Report VR-04LJV8K, generated November 22, 2026.