GPUpartner

VALIDATION REPORT · TEXT GENERATION

Qwen3 Coder 480B A35B Instruct

on RTX PRO 6000 Blackwell · 4-bit (Q4_K_M) · Ollama / LM Studio · Chat

STATUS · NOV 22, 2026

Not validated

0 of 2 checks pass

Qwen3 Coder 480B A35B Instruct at 4-bit needs 274 GB; the RTX PRO 6000 Blackwell can use 96.0 GB. The smallest machine we checked that runs it is the RTX PRO 6000 Blackwell.


VALIDATION

CHECK	TARGET	RESULT	STATUS
Fits in GPU memory	96.0 GB usable	274 GB needed	FAIL
Headroom	5% free	none	FAIL
Context for chat	16K or more	–	NOT TESTED
Writing speed	15 tok/s or more	–	NOT TESTED
First reply	under 3 s, 2K prompt	–	NOT TESTED

Targets: a reply you can read along with, a first reply the use case tolerates, and 5% of memory left free. Calculated from published specs, not benchmarked.

BUDGET

HARDWARE, ONE-TIME	MSRP not entered
POWER, PER YEAR	Doesn't run on this machine
CLOUD INSTEAD, PER YEAR	$6,887
3-YEAR TOTAL, OWNED	n/a
3-YEAR TOTAL, CLOUD	$20,662
BREAK-EVEN	n/a

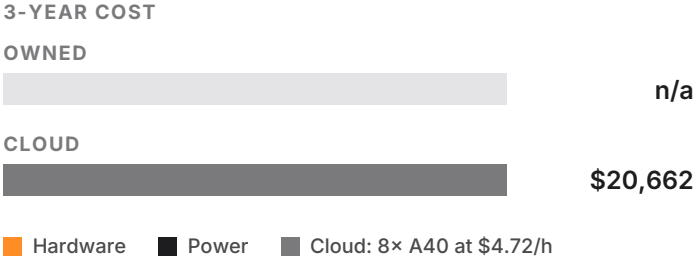

Budget basis: 4 h a day, power at $0.18 per kWh, cloud at RunPod on-demand prices as of Nov 22, 2026. Hardware at the MSRP entered in the calculator, not a GPU Partner quote. A 3-year view; resale value, staff time and taxes aren't counted.

GPUpartner

TECHNICAL DETAIL · TEXT GENERATION

Qwen3 Coder 480B A35B Instruct

on RTX PRO 6000 Blackwell · 4-bit (Q4_K_M) · Ollama / LM Studio · Chat

SETUP

PARAMETERS	480B, 35B active
PRECISION	4-bit (Q4_K_M)
CONTEXT	8K, auto
CHATS AT ONCE	1
USE	Chat
RUNS IN	Ollama / LM Studio
HARDWARE	RTX PRO 6000 Blackwell
GPU CAN USE	96.0 GB of 96.0 GB

MEMORY

WEIGHTS	271 GB
CONTEXT	1.9 GB
RUNTIME	950 MB
SYSTEM	0.0 GB
OVER BY	178 GB

SUGGESTED CHANGES

1.6-BIT WEIGHTS	Fits on the GPU, 8K context
3× RTX PRO 6000 BLACKWELL	Fits across the cards, 8K context
4× RTX PRO 6000 BLACKWELL	Runs it with 256K context
M5 ULTRA · 512 GB	Runs it with 256K context

SAME MODEL, OTHER MACHINES

RTX 4090	Too big
RTX 5090	Too big
M5 MAX 128 GB	Too big
M3 ULTRA 256 GB	2-bit · 30 tok/s
DGX SPARK 128 GB	1.6-bit · 24 tok/s
RYZEN AI MAX+ 395 128 GB	Too big
DGX STATION GB300	3-bit · 140 tok/s

HOW TO RUN IT

LLAMA.CPP	`llama-server -hf unsloth/Qwen3-Coder-480B-A35B-Instruct-GGUF`
VLLM	`vllm serve Qwen/Qwen3-Coder-480B-A35B-Instruct`
MLX (MAC)	`mlx_lm.chat --model mlx-community/Qwen3-Coder-480B-A35B-Instruct-4bit`
MODEL CARD	huggingface.co/Qwen/Qwen3-Coder-480B-A35B-Instruct

METHOD AND ASSUMPTIONS

Memory is the weights (parameters times bits per weight, read from each model's config.json), the context cache for every chat, and the runtime, against the memory this GPU can use after the OS and display take theirs. Writing speed is memory bandwidth over the bytes read per token, plus a per-layer latency, calibrated against llama.cpp benchmarks. First reply is the prompt's FLOPs over the chip's dense 16-bit TFLOPS at the runtime's measured efficiency. Running cost is power at the wall at your rate and hours; the cloud figure is the cheapest RunPod on-demand GPU that runs the same job. Accuracy: memory lands within about a gigabyte; speeds and times are rough, about ±25%. Model data and hardware specs checked Nov 2026; cloud prices are RunPod's on-demand list as of Nov 22, 2026. Report VR-1Y6ATMA, generated November 22, 2026.